












CT EV/3

- 21"
- 25"
- 28"
- 29"
- 34"



Highly cost-effective, high resolution data monitors from Hantarex. Simple to use, the EV/3 range substitutes directly for a normal PC or Apple Macintosh (14-inch) monitor, bringing large screen impact and visibility to in-house and sales presentations, software demonstrations, and training courses.

The range feature industry-standard high density 15-pin D-type VGA connectors with loop through to allow simultaneous display on both the computer's monitor and larger display monitor.

Specifications of products are subject to change without notice.

MECHANICAL DATA

DIM.	A	B	C	D	E	F	G	I	L	M	W
21" mm	430	114	88	507	15	193	262	37	5	418.5	502
28" mm	495	107	143	485	15	193	235	42	5	511	632
29" mm	495	112	143	478	15	193	235	35	5	531.5	650


C.R.T.SIZE AND DIAGONALS

Inches	Diagonal	Ratio	U.S.A.
21"	51 cm	4/3	19 V
25"	59 cm	4/3	23 V
28"	66 cm	4/3	26 V
29"	68 cm	4/3	27 V
34"	80 cm	4/3	32 V

MAIN DIMENSIONS AND WEIGHTS TABLE

	HEIGHT	WIDTH	DEPTH	WEIGHT
21" EQ/3	423.5mm	502mm	507mm	28.0 Kg
PRODUCT CODE	02197050			
25" EQ/3	472mm	575mm	498mm	31.1 Kg
PRODUCT CODE	02197290			
28" EQ/3	516mm	632mm	485mm	39.2 Kg
PRODUCT CODE	02196990			
29" EQ/3	536.5mm	650mm	478mm	45.5 Kg
PRODUCT CODE	02197130			
34" EQ/3	629.5mm	760mm	560mm	58.7 Kg
PRODUCT CODE	02197310			

RGB-ANALOGIC CONNECTOR

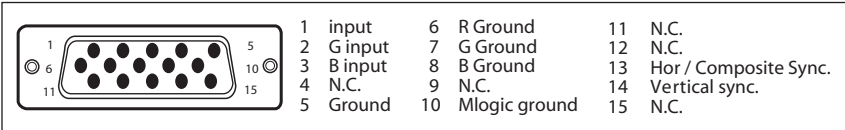

BANDWIDTH	22 MHz - 3 dB; rise/fall time 20 ns
HORIZONTAL SYNC: FREQUENCY	31 - 38KHz autosync; blanking 4.6 ns
VERTICAL SYNC: FREQUENCY	48 - 120Hz autosync; blanking 0.55 ms
AUDIO power output (optional)	6 W 8 ohm
MAIN REQUIREMENTS	180 - 264V AC 50Hz - (90 - 130V AC 60Hz, USA)
POWER CONSUMPTION	150 W MAX
OPERATING TEMPERATURE	+ 0 °C - 45 °C
MICROPROCESSOR CONTROL SYSTEM	"ON SCREEN DISPLAY" to adjust the analog levels, geometry and colors. Automatic detection and adjustment of the geometry with the various standards, VGA and S-VGA
DEGAUSSING SYSTEM	Manually from the "ON SCREEN DISPLAY"
VIDEO CONNECTORS	D15 INPUT -OUTPUT for analogue VGA-SVGA
CONTROLS	5 key control panel (on the back of the monitor)
AUDIO CONNECTORS	Mono/Stereo RCA audio connectors
IMPEDANCE SWITCH	75 ON/OFF switch for the VGA/SVGA analog inputs
SAFETY	Compliance with EN 60950 X-Ray emission protection